


850-HPW-HOUSING



850-HPW HIGH PRESSURE HOUSING UNIT

Designed for cleaning the cable with hot or cold water.

CONNECTS TO ALL PRESSURE WASHER SYSTEMS.

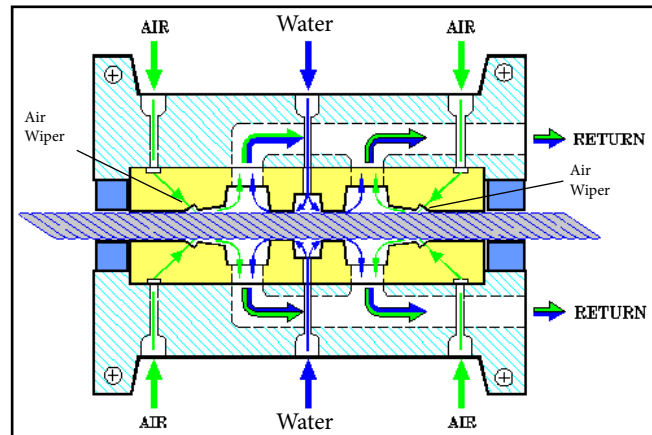

GENERAL OBJECTIVE

The systems objective is to clean Cable or Wire Rope with high pressure hot or cold water supplied by a pressure washer unit.

NOTE:

The 850-HPW housing can be connected to all makes of pressure washers with a maximum pressure of 4000 psi.

SOLD WITH

- (1) Liner / Seal (Any Size)
- (2) Guide Bushing Set (Any Size)
- (1) 850-HPW Housing
- (4) Shackles
- (1) Air Hose with Couplers & Control Valve
- (2) Return Hoses the Cam Couplers
- (2) Tie-Down Ratchet Strap 1" x 15 Ft.

CABLE CAPACITY

Min. Cable Dia. 0.048" (1.22 mm)
Max. Cable Dia. 1.600" (40.6 mm)
Max. Water Pressure & Temp.
4000 PSI @ 180 F

AIR REQUIREMENT

Min. Air Capacity: 15 CFM @ 100 PSI
Min. Air Pressure: 70 PSI
Max. Air Pressure: 150 PSI

For most operations (20 cfm of air at 100 psi) is recommended.